PowerFlo II



As defined by EN 17645.
Go to report pages to see the complete detail by item.

YEARS OF WARRANTY
TH TOTALLY HAYWARD 3 STANDARD

SMALL PUMP FOR OUTSTANDING RESULTS!

- **Pump designed for small pools** and/or above ground pools
- **Exceptional performance**, one of the best in its category

Easy access to the pre-filter through the quarter turn cover

Drainage caps to make wintering easier

50 mm outlet or ø 32/38 mm fluted adapters

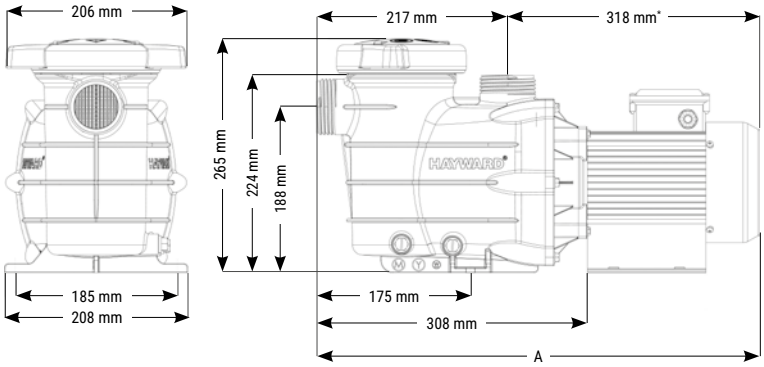

Pressure (mbar)

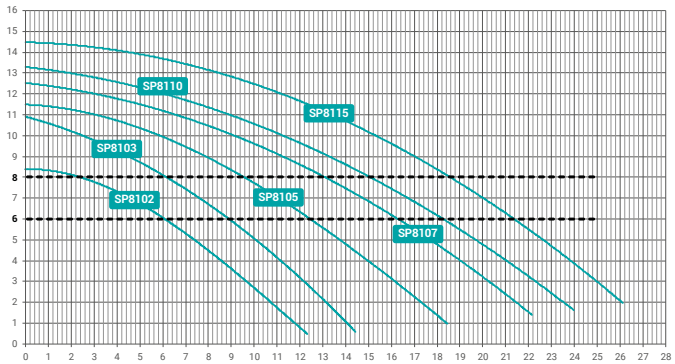

Flow rate (m³/h)

Technical Specifications

Max. water temp.	35°C
Adapter	32/38 mm
Mechanical seal	AISI 304S, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IPX5, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/PPO(Noryl®)+BRASS/PC
Prefilter basket size	1.1 L

	Type HP	Total length A (mm)	Weight (kg)	Adaptors (mm)	Flow rate*	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor P2 (W)	Amps at P1 Max (A)	Quantity per pallet	Item
POWERFLO II	0.25	504	7.9	50 and 32/38	6.15 m³/h**	360	235	1.6	32	SP8102XE31E2
	0.33	504	7.9	50 and 32/38	6.26 m³/h	460	330	2	32	SP8103XE61E2
	0.5	504	8.8	50 and 32/38	9.71 m³/h	580	440	2.6	32	SP8105XE81E2
	3/4	504	9.8	50 and 32/38	13 m³/h	730	585	3.2	32	SP8107XE111E2
	1	504	9.8	50 and 32/38	15 m³/h	860	690	3.8	32	SP8110XE161E2
	1.5	540	12.3	50 and 32/38	18.75 m³/h	1050	860	4.6	32	SP8115XE221E2

* At 8 m water column pressure
** At 6 m water column pressure