HAYWARD

HCP 3600 Series

YEARS OF WARRANTY 3 STANDARD

MADE IN EU

HIGH PERFORMANCE TEFC

- Pump made of glass-fibre reinforced thermoplastics
- **Light weight and easy to install**
- The three-phase motors are compliant with the IE3 standard
- Turbine made of reinforced Noryl
- This pump is **suitable for salt water and sea water**
- Strainer with **transparent cover for easy maintenance**
- Twist-lock cover includes diameter 75 mm socket unions
- Uses: large pools, spas, water features
- Recommended for pools **up to 270 m³**

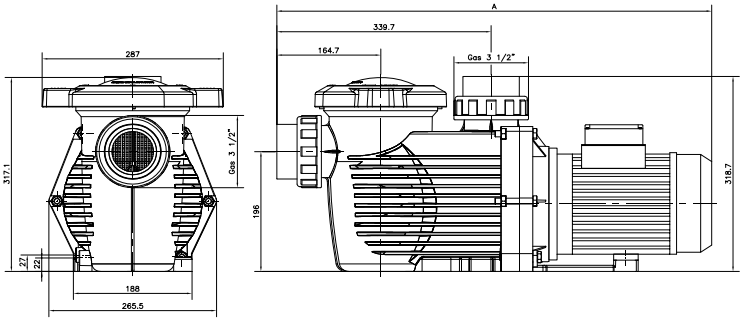

- **HCP3600 SERIES Curves**

Total dynamic head (m)

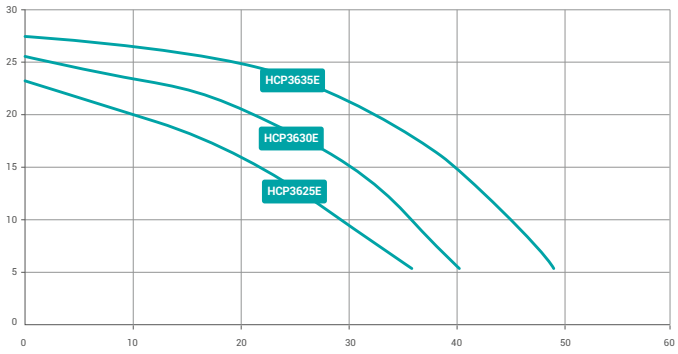

Flow rate (m³/h)

Technical Specifications

Max. water temp. / Max. pressure	50°C / 2,5 bar
Connection (DIN slip included, for others please ask)	ø 75
Mechanical seal	AISI 316, suitable for salt water
Motor specifications	Class F, IP55, 50 Hz, 2850 rpm
Housing/impeller/strainer/lid	PP + F.G/Noryl®/ PP/ SAN®

	Type HP	Dim A (mm)	Weight (kg)	Fitting (mm)	Flow rate*	P1 Max (W) (Maximum consumption of the pump)	Amps at P1 Max (A)	Packaging dimensions (mm)	Quantity per pallet	Item	
SINGLE PHASE HCP 3600	2.5	669	24	75	30 m³/h	2.4	12.5	285 x 285 x 720	20	HCP36251E	
	3	669	26	75	36 m³/h	2.8	14.5	285 x 285 x 720	20	HCP36301E	
THREE PHASE HCP 3600	2.5	669	28.5	75	30 m³/h	2.1	8.3 / 4.8	285 x 285 x 720	20	HCP36253E	IE3✓
	3	669	28.5	75	36 m³/h	2.8	8.8 / 5.1	285 x 285 x 720	20	HCP36303E	IE3✓
	3.5	710	31.5	75	45 m³/h	3.8	12.1 / 7	285 x 285 x 720	20	HCP36353E	IE3✓

* Under 10 m water column pressure