

MaxFlo[®] XL VSTD



EXCELLENT VALUE FOR MONEY

- Smart Inverter + Permanent Magnet Motor + synchronized motor : electricity saving up to 85%*
- **Extremely quiet**
- **180° rotary box for convenient access** to the user interface
- **Twist-Lock opening cover** for easy maintenance
- **Union fittings provided**
- Recommended for pools **up to 65 m³****




* Running at low speed.
Electricity savings of 65% are generally achieved.

** Running at low speed 24 hours



The intuitive control module displays relevant information such as real-time energy consumption. Improved control box, with the addition of five daily programs. "Skimming" function that allows the surface to be automatically skimmed every 1, 2 or 3 hours. **Timer Mode.**

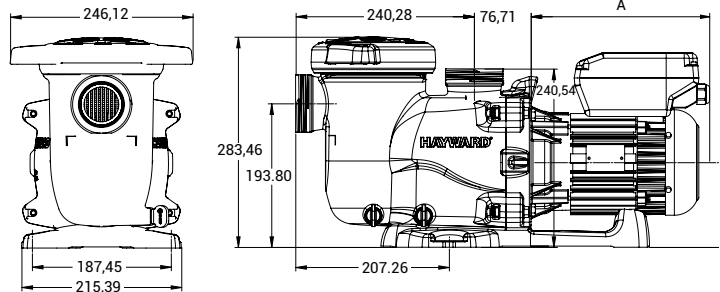


VS PUMP CONFIGURATOR

As we know, it is not always easy to define the right pump for your pool, we have developed a tool to do this step easier. In a few clicks you will find which is the best Hayward[®] variable speed pump and the savings you can achieve.


Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304, compatible with salt treatment (salt chlorinator)
Motor-drive specifications	Class F, IP55, 50 Hz, Brushless VFD
Housing/impeller/strainer/lid	PP+GF/Noryl [®] + GF/ABS/PC
Prefilter size	1.5 L

• 1 HP Model Curve

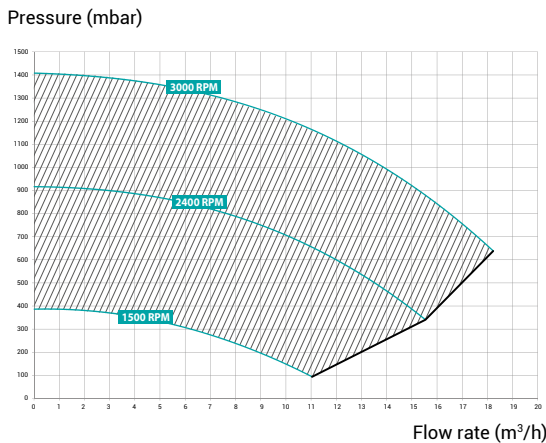

• 1.5 HP Model Curve

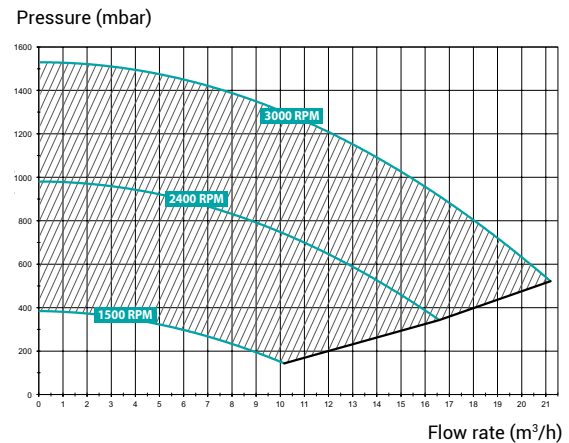

MAXFLO[®] XL VSTD

Speed	Type HP	Dim. A (mm)	Weight (kg)	Fitting** (mm)	Flow rate*	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor P2 (W)	Amps at P1 Max (A)	Item
600 - 3000 RPM (20 rpm)	1	241	15.3	50	@10 m: 13.8 m ³ /h @8 m: 16.5 m ³ /h	950	750	4.4	SP2310VSTD
600 - 3000 RPM (20 rpm)	1.5	265	15.3	50 and 63	@10 m: 15.3 m ³ /h @8 m: 18 m ³ /h	1240	1 100	5.9	SP2315VSTD

* At 3000 Rpm

** All bodies have a 1,5" thread. Possibility of having gluing AINSI connection 2" by buying code SP2700UNKIT.