Barcelona Bobbin Wound Filter

YEARS OF WARRANTY 10 TANK 3 EQUIPMENT

MADE IN EU

THE EXTRA PERFORMANCE UNDER HARD CONDITIONS

- Long-lasting **bobbin wound technology** allows high pressures rates
- **Maximum pressure: 2.5 bar**
- **Test pressure: 3.75 bar**
- **Reliable under the most exigent environments**
- **Operating pressure : 0.5 to 2.5 bar**
- Includes 6-way Vari-Flo™ valve
- Usages: **for residential or semi-commercial pools**

Transparent wide cover for easy maintenance

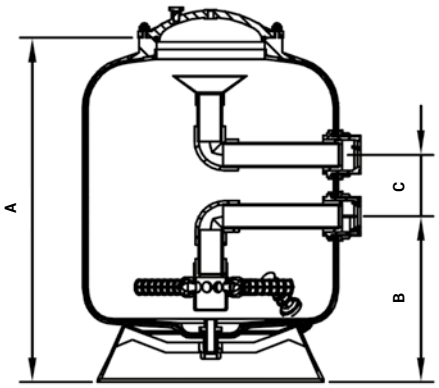

Technical Specifications

Max. water temperature	50°C
Operating pressure	0.5 – 1.5 kg/cm²
Maximum pressure	2.5 kg/cm²
Filtration speed	50 m³/h/m²
Tank / Laterals / Unions / Cover	Polyester+FG/ABS/PP/ABS/PC
Granulometry of filtration media	0.4 – 0.8 mm

	Flow rate	Diameter ø	In/Out	Filtration area	Empty weight	Sand	Dimensions A	Dimensions B	Dimensions C	Item	Replacement valves*
BARCELONA BOBBIN WOUND FILTER	9.5 m³/h	500 mm	1.5"	0.19 m²	22 kg	100 kg	700 mm	337 mm	125 mm	HCFE2115I2WVA	Valve: SP0643SKR-LP Connections: 500200060201
	14 m³/h	600 mm	1.5"	0.28 m²	24 kg	150 kg	800 mm	382 mm	125 mm	HCFE2415I2WVA	
	21 m³/h	750 mm	2"	0.44 m²	29 kg	275 kg	865 mm	397 mm	141 mm	HCFE312I2WVA	Valve: SP0663SKR-LP Connections: 500200060301
	28 m³/h	900 mm	2"	0.63 m²	64 kg	450 kg	950 mm	435 mm	141 mm	HCFE352I2WVA	

*When changing a valve. it is necessary to purchase both the valve and the appropriate connection