

HCP4200 SERIES


1 450 rpm pumps




- ▶ 5.5 hp to 10 hp
- ▶ 1 450 rpm
- ▶ Pump material: thermoplastic pumps

High efficiency pumps

- Self-priming centrifugal pump made of glass-fibre reinforced thermoplastics
- The three-phase motors are compliant with the IE3 standard
- Turbine made of reinforced Noryl
- This pump is suitable for salt water and sea water
- 4-pole motor operating at 1 450 rpm / 50 Hz
- High-capacity strainer (14 l) with transparent cover for easy maintenance
- Elevated base to ensure proper motor ventilation
- ANSI connectors can be provided under request

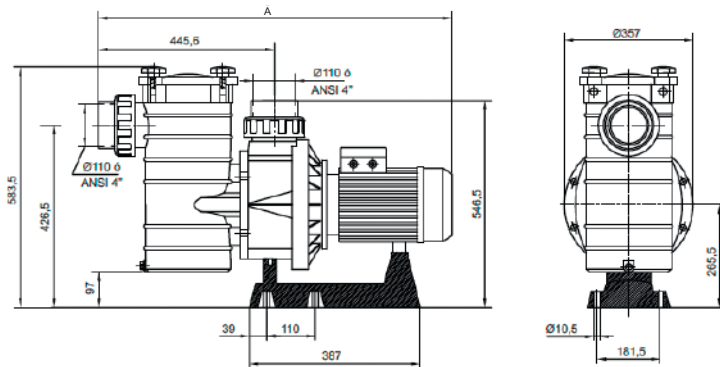

☞ HCP4200 SERIES Curves

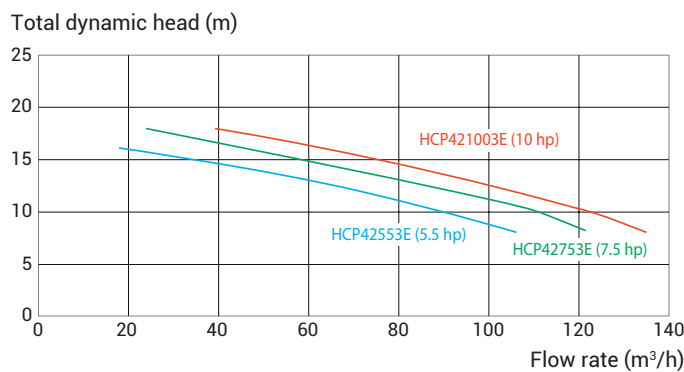

HCP 4200 SERIES

Reference	P2 (HP)	P1 (kW)	Flow rate* (m³/h)	Inlet / Outlet (mm)	Weight (kg)	Motor	Amperage (A)	Dim A (mm)	Packaging dimensions (mm)	Qty. per pallet (uds)	IE3
HCP42553E	5.5	4.71	68	110	46	Three-phase 400 / 700V	9.1 / 5.3	889	940 x 390 x 620	6	IE3 ✓
HCP42753E	7.5	7	90	110	50	Three-phase 400 / 700V	12.3 / 7.1	914	940 x 390 x 620	6	IE3 ✓
HCP421003E	10	8.7	104	110	70	Three-phase 400 / 700V	16.0 / 9.3	944	1101 x 400 x 630	3	IE3 ✓

* under 12 m water column pressure / P1 Power Input / P2 Nominal power